



## Bambu Filament

Technical Data Sheet V1.0

# PLA Silk

### • Basic Info

**Bambu PLA Silk** offers a silk-like and high-glossy that adds a luxury appearance to your prints while retaining PLA's ease of use. Different with other silk filaments, Bambu PLA Silk was toughened and demonstrates greater resistance to breakage when using AMS printing. Bambu PLA Silk is ideal for decorations, artistic projects, and 3D character models or any parts where you want it shinier.

### • Specifications

Subjects	Data
Diameter	1.75 mm
Net Filament Weight	1 kg
Spool Material	ABS (Temperature resistance 70 °C)
Spool Size	Diameter: 200 mm; Height: 67 mm

### • Recommended Printing Settings

Subjects	Data
Drying Settings before Printing	55 °C, 8 h
Printing and Storage Humidity	< 20% RH (Sealed with desiccant)
Nozzle Temperature	210 - 240 °C
Bed Type	Cool Plate, High Temperature Plate or Textured PEI Plate
Bed Surface Preparation	PVP Glue
Bed Temperature	35 - 45 °C
Cooling Fan	Turn on
Printing Speed	< 250 mm/s
Retraction Length	0.6 - 1.0 mm
Retraction Speed	20 - 40 mm/s
Chamber Temperature	25 - 45 °C
Max Overhang Angle	55 °
Max Bridging Length	~ 30 mm
Support Material	Support for PLA

## • Properties

Bambu Lab has tested the differing aspects in the performance of PLA Silk material, including physical, mechanical, and chemical properties. Typical values are listed as followed:

Physical Properties		
Subjects	Testing Methods	Data
Density	ISO 1183	1.19 g/cm <sup>3</sup>
Melt Index	210 °C, 2.16 kg	20.5 ± 1.2 g/10 min
Melting Temperature	DSC, 10 °C/min	152 °C
Glass Transition Temperature	DSC, 10 °C/min	57 °C
Crystallization Temperature	DSC, 10 °C/min	N / A
Vicar Softening Temperature	ISO 306, GB/T 1633	56 °C
Heat Deflection Temperature	ISO 75 1.8 MPa	50 °C
Heat Deflection Temperature	ISO 75 0.45 MPa	53 °C
Saturated Water Absorption Rate	25 °C, 55% RH	0.52%

Mechanical Properties		
Subjects	Testing Methods	Data
Young's Modulus (X-Y)	ISO 527, GB/T 1040	2470 ± 230 MPa
Young's Modulus (Z)	ISO 527, GB/T 1040	1390 ± 120 MPa
Tensile Strength (X-Y)	ISO 527, GB/T 1040	35 ± 3 MPa
Tensile Strength (Z)	ISO 527, GB/T 1040	18 ± 2 MPa
Breaking Elongation Rate (X-Y)	ISO 527, GB/T 1040	3.5 ± 0.6 %
Breaking Elongation Rate (Z)	ISO 527, GB/T 1040	1.7 ± 0.2 %
Bending Modulus (X-Y)	ISO 178, GB/T 9341	2220 ± 50 MPa
Bending Modulus (Z)	ISO 178, GB/T 9341	1880 ± 60 MPa
Bending Strength (X-Y)	ISO 178, GB/T 9341	77 ± 3 MPa
Bending Strength (Z)	ISO 178, GB/T 9341	26 ± 2 MPa
Impact Strength (X-Y)	ISO 179, GB/T 1043	24.5 ± 1.7 kJ/m <sup>2</sup> ; 8.2 ± 0.5 kJ/m <sup>2</sup> (notched)
Impact Strength (Z)	ISO 179, GB/T 1043	4.6 ± 1.1 kJ/m <sup>2</sup>

All the specimens ( 80\*10\*4 mm ) were printed at the following settings: Nozzle Temperature = 230 °C, Printing Speed = 200 mm/s, Bed Temperature = 35 °C, Infill Density = 100%. All the specimens were annealed and dried at 55 °C for 8 h before testing.


Other Physical and Chemical Properties	
Subjects	Data
Odor	Odorless
Composition	Polylactic acid
Skin Hazards	No hazard
Chemical Stability	Stable under normal storage and handling conditions
Solubility	Insoluble in water
Resistance to Acid	Not resistant
Resistance to Alkali	Not resistant
Resistance to Organic Solvent	Not resistant to some organic solvents
Resistance to Oil and Grease	Resistant to most kinds of oil and grease
Flammability	Flammable and self-extinguishing in the air
Combustion Products	Water, carbon oxides
Odor of Combustion Products	Odorless

- **Specimen Test**


Specimen Printing Conditions	
Subjects	Data
Nozzle Temperature	230 °C
Bed Temperature	35 °C
Printing Speed	200 mm/s
Infill Density	100%

*\*All the specimens were annealed and dried at 55 °C for 8 hours before testing.*


### 1. Tensile Testing

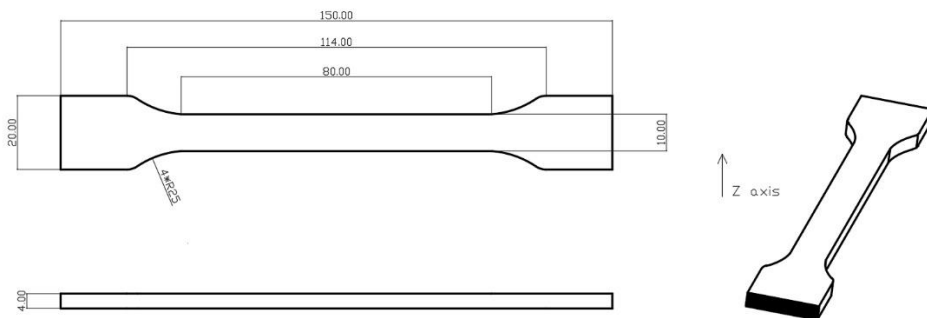

## 2. Bending Testing

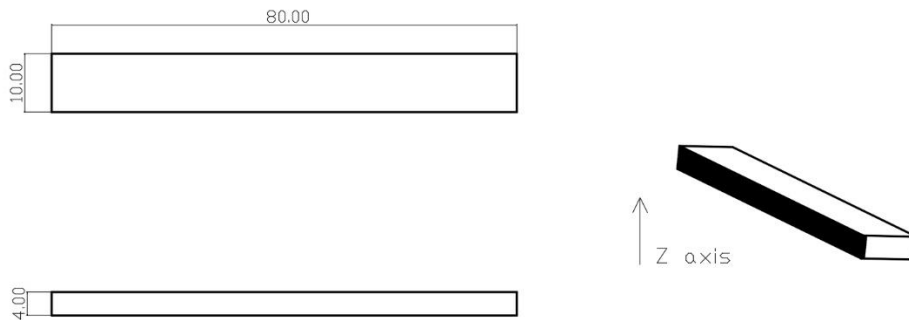

## 3. Impact Testing

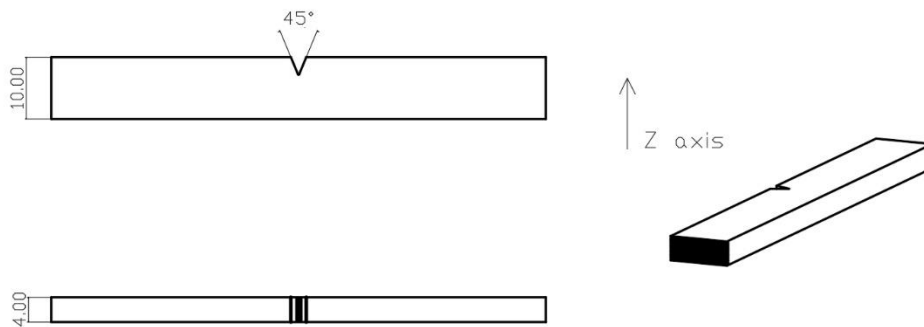

- **Disclaimer**

The performance values are tested by standard samples at Bambu Lab, and the values are for design reference and comparison only. Actual 3D printing model performance is related to many other factors, including printers, printing conditions, printing models, printing parameters, etc.

In the process of using Bambu Lab 3D printing filaments, users are responsible for the legality, safety, and performance indicators of printing. Bambu Lab is not responsible for the use of materials and scenarios and is not responsible for any damage that occurs in the process of using our filaments.